


Folding Instructions

Follow these simple steps:

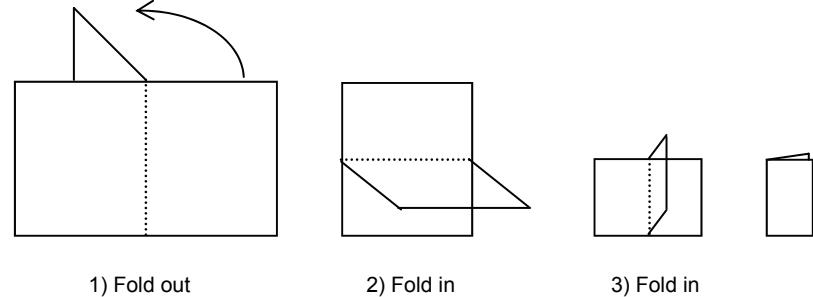

1) Fold out

2) Fold in

3) Fold in

Second fold in (over)
Folding instructions on inside

Last fold in (over)
Features and benefits on inside

First fold out (back)
Text on outside

1

First fold out (back)
Text on outside

1

MU500-112 receiver unit ("breakout box") facilitates individual power, HDMI, and IR control at the rates in individual power, HDMI, and IR control at the destination display. Connectors for HDMI, power, and IR signals. Power of up to 150 watts and industry standard compact, easy to conceal unit provides local connection to large multi-display AV systems.

The MU500-112 receiver unit ("breakout box") facilitates individual power, HDMI, and IR control at the destination display. Connectors for HDMI, power, and IR signals. Power of up to 150 watts and industry standard compact, easy to conceal unit provides local connection to large multi-display AV systems.

The MU200-110 HDMI and power transmitter chassis provides a total of 1,500 watts. MU200-110 HDMI and power transmitter chassis

Chassis supports up to 10 MU300-104 HDMI, HDMI, & IR distribution. MU200-110 HDMI and power transmitter chassis

Provides a total of 1,500 watts. MU200-110 HDMI and power transmitter chassis

Bandwidth Digital Content Protection (HDCP) standards. Fully compliant with HDMI and HDCP (High-Bandwidth Digital Content Protection) standards.

Integrators have greater control over their AV projects. Integrators have greater control over their AV

Enables AV integrators to eliminate the worry of building outlet placement—lowering costs that can be passed on to the client.

Electrical outlet placement and the associated building permits—lowering costs that can be passed on to the client.

Enables AV integrators to eliminate the worry of building outlet placement—lowering costs that can be passed on to the client.

Integrators have greater control over their AV projects. Integrators have greater control over their AV

Benefit

Feature

Muse
Power, HDMI, IR Control

Advantages:

- With Muse, system integrators gain easy and complete control over their AV installation from start to finish.
- Like the MU300-104 card, the MU400-111 stand-alone transmitter is also available. It delivers up to 150 watts of power, HDMI, and IR control over a single, shielded CAT-6 cable.
- Built with Energy Star requirements in mind, the output from each transmitter can power displays up to 52 inches with the available 150 watts — well within 2012 specifications that require 50-inch displays to draw less than 108 watts during normal operation.
- All Muse components are easily field replaceable.
- FlexDA HDMI Distribution Amplifier automatically self-configures based on the input signal for each card, enabling an integrator to build ten 1x1's, two 1x5's, one 1x10, or any configuration in between.

Pocket Pitch

Altinex

Muse™ AV Distribution System



Description: Muse facilitates power, HDMI® and IR control over a single CAT-6 line to drive displays upwards of 52 inches up to 300 feet away.

Target Customer: A/V System Designers, Integrators, & Technology Managers.

Target Installations: Sports bars / restaurants, digital signage, and similar applications.

ALTINEX®