


Folding Instructions

First fold out (back)
Text on outside

1

Follow these simple steps:

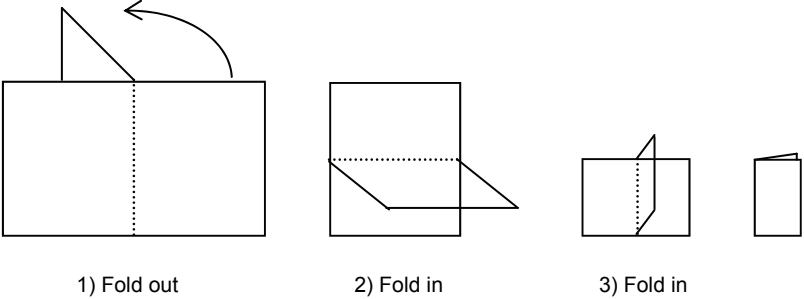

Second fold in (over)
Folding instructions on inside

2

Last fold in (over)
Features and benefits on inside

3

The TNP602C is highly customizable.	
More than twenty-seven different connector options available—all factory-configured and terminated for effortless installations. The unit's bezel is available in black or brushed aluminum.	The TNP602 features gas-spring technology that provides smooth open and close with an ultra-flat surface when closed.
Unit auto-tilts open by pushing down on the top cover. When closed, the flat surface reduces the chance for paperwork to catch the TNP602's edges—so documents remain clean and professional in appearance.	With both the TNP602 and TNP602C, network signals are passed through the device with connection to the network system being under the table.
No signal processing or buffering takes place within the interconnect box.	All connectors have 6-foot cables attached that feed through to the bottom of the unit. The power cable is 10 feet long.
Facilitates easy, under-table connectivity to AV system switchers, computer video interfaces, distribution amplifiers, etc.	

Benefit	Feature
This versatile interconnect box provides high density access to a variety of connectors, including multiple power receptacles, composite video, left and right channel audio, S-video, telephone, network, VGA, and USB. (See Advantages for complete list.)	The TNP602 / TNP602C are the ideal boardroom choices for quick and convenient patching of equipment into a company's data network or presentation system.
	TNP602 / 602C Interconnect Boxes

Advantages:

- Standard configuration includes 4 U.S. power receptacles, 1 composite video (RCA F/F), 1 left channel audio (RCA F/F), 1 right channel audio (RCA F/F), 1 S-video (4-pin Mini-Din F/M), 1 telephone (RJ-11 F/M), 3 network (RJ-45 F/M), 2 computer/MP3 audio (3.5 mm F/M), 2 VGA computer video (15-pin HD F/M), and 2 control (USB F/M).
- TNP602C customization options include connectors such as HDMI®, 3-and 4-pin Mini XLR, H-Position control with signal present LED, and more. Please see the Altinex website for a complete listing.
- The TNP602's inputs are accessed by pushing down on the top cover, allowing the unit to "tilt" open.
- The TNP602 / TNP602C are designed for mounting into tables, podiums, or other furniture as part of a presentation system.
- Standard TNP602 ships with a high quality matte black finish bezel.

Pocket Pitch

Altinex

TNP602 / TNP602C Tabletop
Interconnect Boxes



Description: A compact interconnect solution that provides convenient, one touch access to a variety of video, audio, computer, network, and power connections.

Target Customer: A/V Integrators & Technology Managers.

Target Installations: Conference facilities, boardrooms, presentation spaces, and similar venues.

